

COLOR DETAILS CLEARLY VISIBLE

HIGH COLOR RENDERING, LOW
LIGHT ATTENUATION, HIGH-
LIGHTING COMMODITY DE-
TAILS AND MATERIALS



Product Features

Free rotation, Combined with orbital movement,

Can be rotated in all directions, any adjustment of the light effect. Eye protection, no strobe

Constant current and constant voltage driver, soft light without glare

PRODUCT INFORMATION

FOCUS ON INDOOR LIGHTING

MODEL NO. :HU2398



Power	<u>10W</u>	<u>30W</u>	<u>40W</u>
Luminous Flux	650lm	2100lm	2800lm
Efficacy	65lm/W	70lm/W	70lm/W
Size(mm)	110*60mm	168*74mm	170*83mm
Chip (SMD)	COB		
CCT	3000K/4000K		
Lamp body color	BK/WH		
Power Factor	DF>0.7	DF>0.9	DF>0.9
CRI	Ra>80		
Input (V)	AC220-240V 50/60Hz		
Lifespan (hours)	20000h		
Beam Angle	120°		
Material	Aluminum + Engineering Plastics		
Installation	Track Mounted		
Warranty	2 YEARS WARRANTY		

PRODUCT DETAILS

Insulating base

ABS material, humanized design Simple and safe installation

Multi-angle rotation

Left and right, up and down
Turn smoothly

High-quality aluminum

Precision aluminum, frosted texture, high quality and durable

COB light source

Good light color, high brightness
Light decay small, long life


Cup with snap joint

Connect the body, more stable

Strong Heat Dissipation

Strong air convection design Rapid heat dissipation



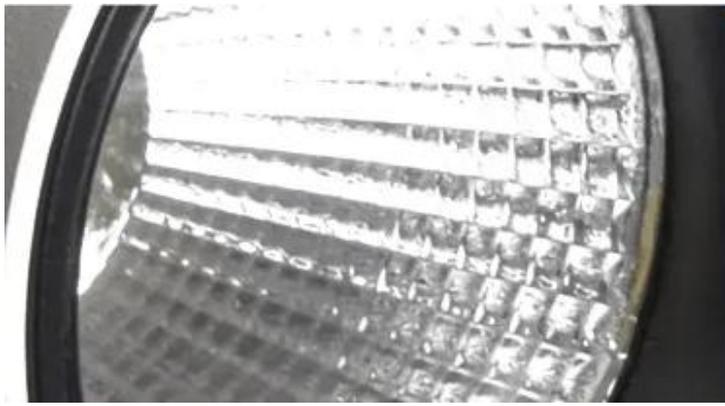


Imported chips

—
Imported chips, durable
Stable light source without flicker

Three light colors are available

Create a different atmosphere

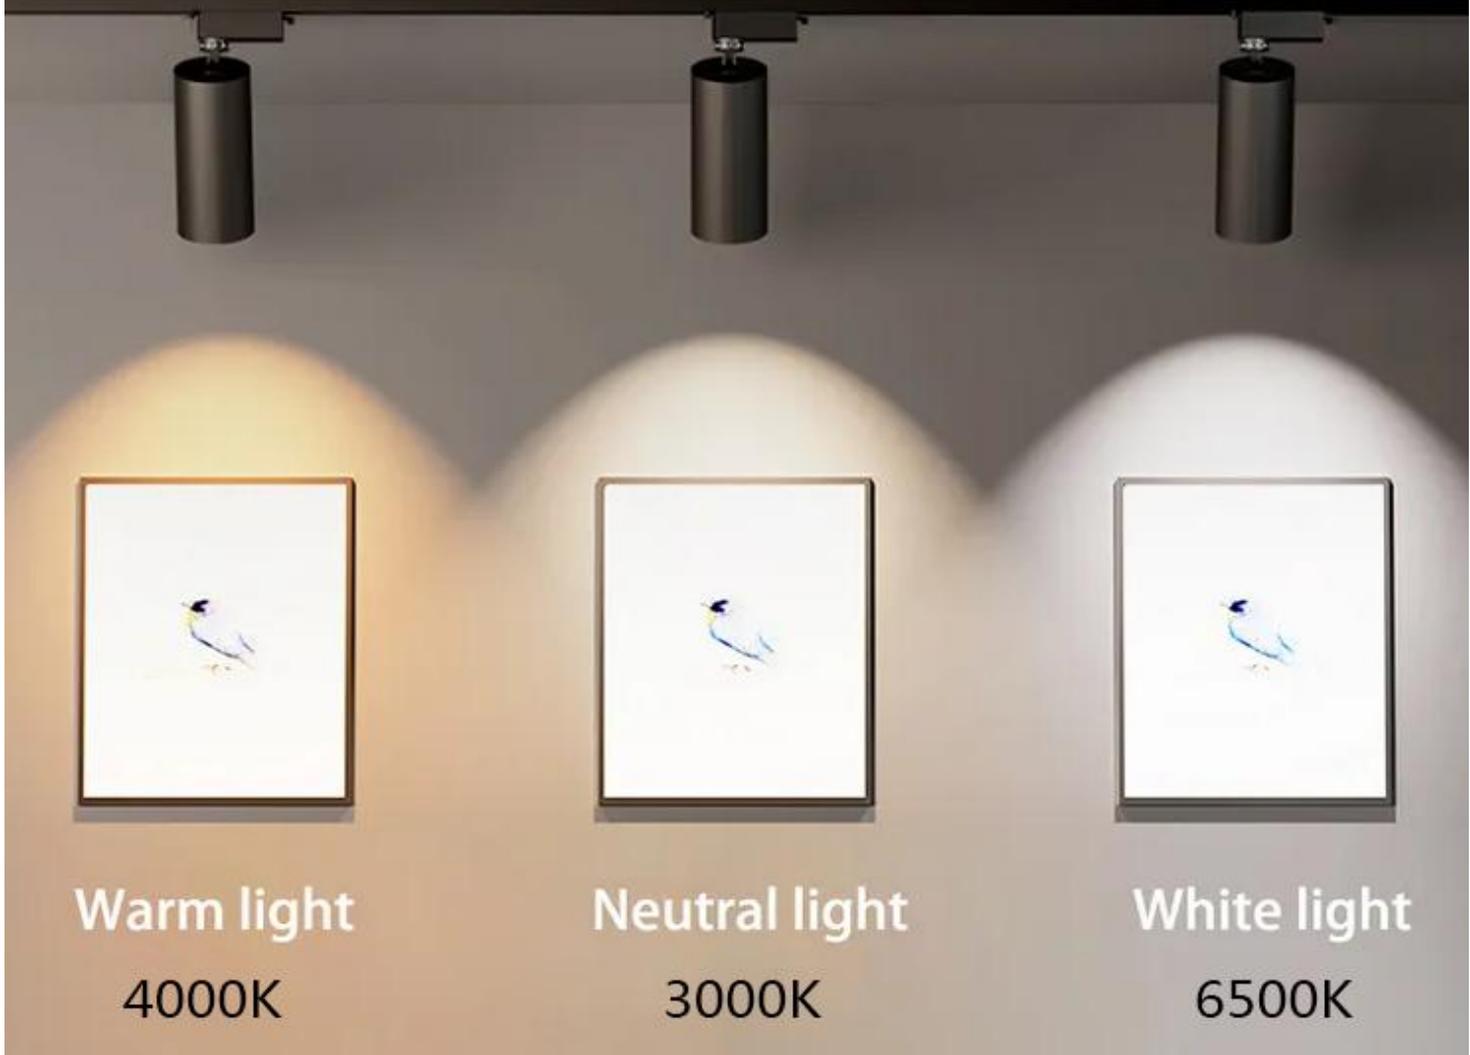

OUR PROJECTS

MAGNETIC TRACK LIGHT



OFFICE
FROM RUSSIA



HOME
FROM GERMANY



HOME
FROM ITALY



ART GALLERY
FROM SINGAPORE



SUPERMARKET
FROM MALAYSIA



SHOWROOM
FROM MALAYSIA





INSTALLATION INSTRUCTIONS FOR LAMPS





1. REMOVE THE JUNCTION BOX



2. CONNECT THE POWER CORD
AND COVER THE JUNCTION BOX

3. ADJUST THE BAYONET JOINT OF THE LAMP BASE TO
BE PARALLEL TO THE RAIL AND CLIP IT INTO THE RAIL

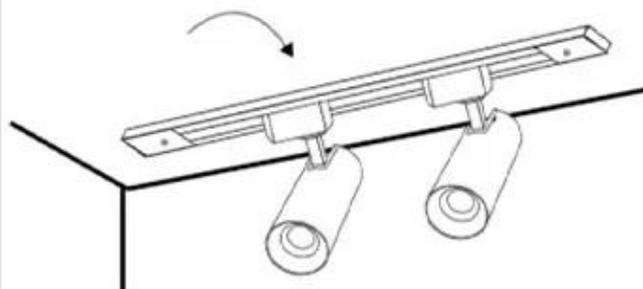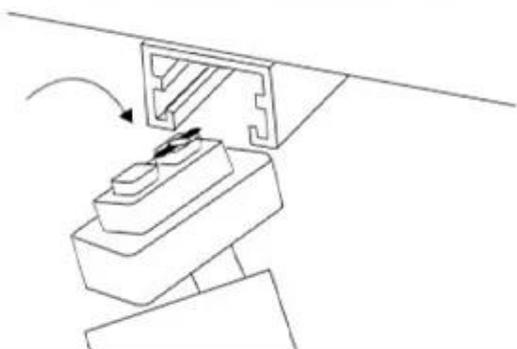

4. MOVE THE BUCKLE, FIX IT,
AND INSTALL IT